

BRUSHLESS MOTOR
EX310EAP
 ELECTRONIC DRIVE
DIGIVEX 2/4 - 400




Low speed torque	1.75	N.m	M _o
Max speed	4000	rpm	N
DC voltage supply when motor is loaded	540	V	Û
Permanent current at low speed	1.75	Â	Î _o
Peak current	4	Â	Î _{maxi}
Back emf constant at 1000 rpm (25°C)*	126	V	K _e
Torque sensitivity	1	N.m/Â	K _t
Winding resistance(25°C) *	20.7	Ω	R _b
Winding inductance *	62	mH	L
Rotor inertia	7.9	kg.m ² × 10 ⁻⁵	J
Thermal time constant	20	min	T _{th}
Motor mass	2.4	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

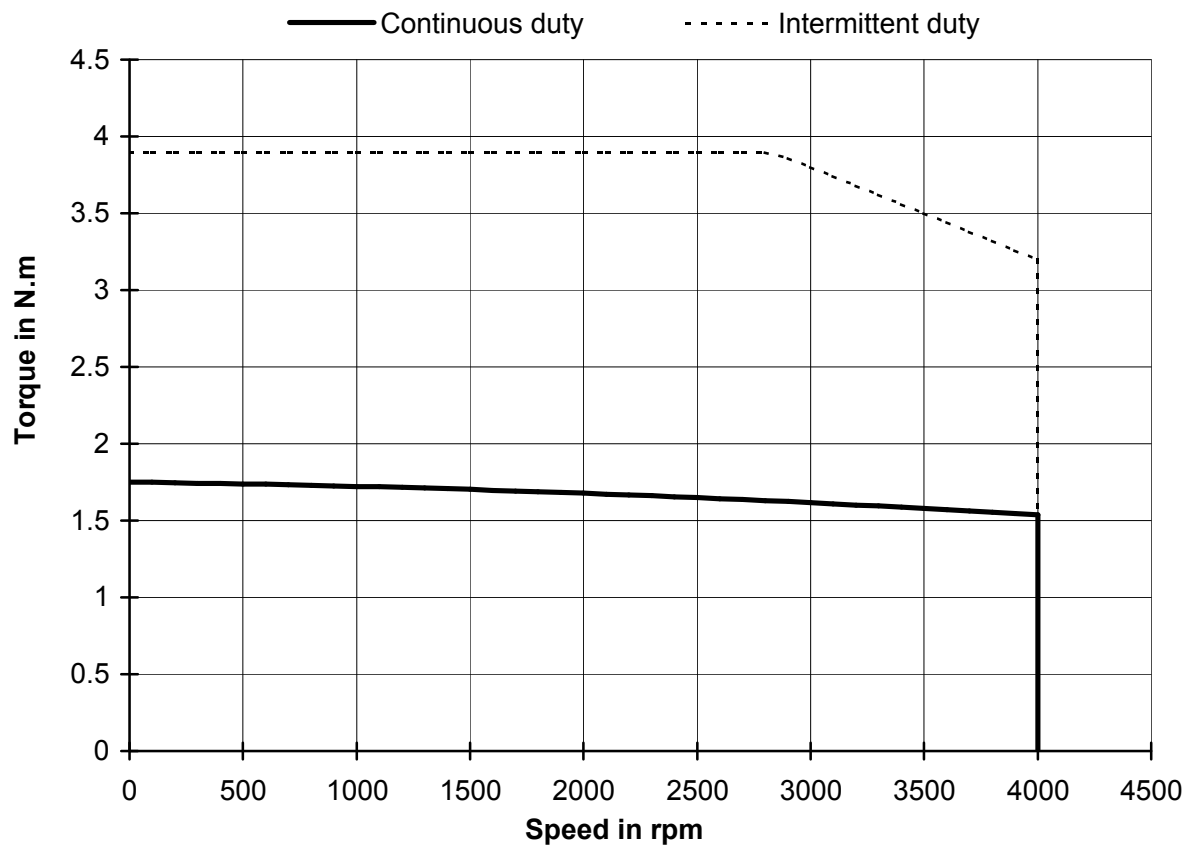

Characteristics are given for an optimal drive of the motor

FICHE-009

Création: 13 oct 2003

Edition:

25/mai/2005

EX310EAP

.