

BRUSHLESS MOTOR
EX860EAJ
 ELECTRONIC DRIVE
DIGIVEX 32/64 - 400




Low speed torque	35	N.m	M _o
Max speed	2600	rpm	N
DC voltage supply when motor is loaded	540	V	Û
Permanent current at low speed	22.4	Â	Î _o
Peak current	56	Â	Î _{maxi}
Back emf constant at 1000 rpm (25°C)*	196	V	K _e
Torque sensitivity	1.56	N.m/Â	K _t
Winding resistance(25°C) *	0.499	Ω	R _b
Winding inductance *	6.43	mH	L
Rotor inertia	920	kg.m ² x 10 ⁻⁵	J
Thermal time constant	60	min	T _{th}
Motor mass	40	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

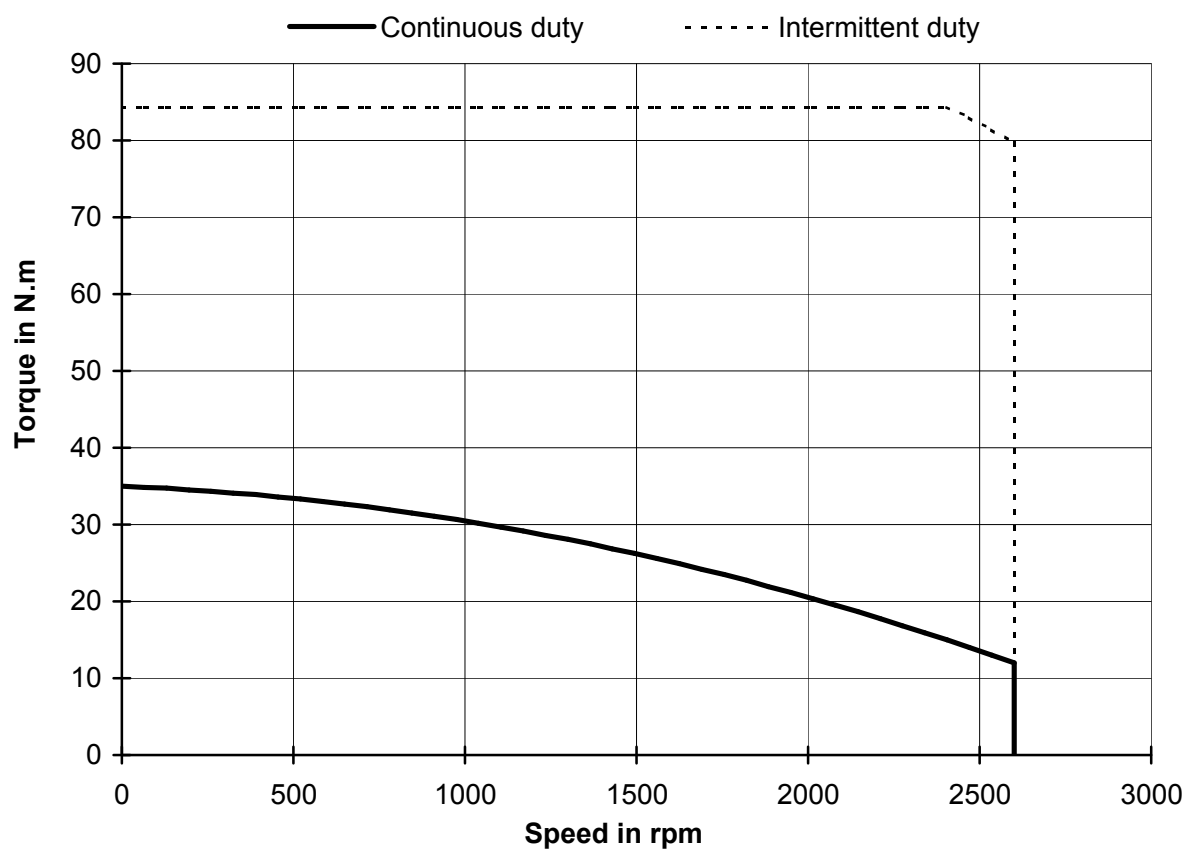

Characteristics are given for an optimal drive of the motor

FICHE-009

Création: 18 mai 2004

Edition:

25/mai/2005

EX860EAJ

. -