

BRUSHLESS MOTOR
EX630EAN
 ELECTRONIC DRIVE
DIGIVEX 16/32 - 400




Low speed torque	10.4	N.m	M _o
Max speed	4000	rpm	N
DC voltage supply when motor is loaded	540	V	Û
Permanent current at low speed	10.6	Â	Î _o
Peak current	26.5	Â	Î _{maxi}
Back emf constant at 1000 rpm (25°C)*	126	V	K _e
Torque sensitivity	0.982	N.m/Â	K _t
Winding resistance(25°C) *	1.12	Ω	R _b
Winding inductance *	10.9	mH	L
Rotor inertia	147	kg.m ² × 10 ⁻⁵	J
Thermal time constant	33	min	T _{th}
Motor mass	12.5	kg	M

All data are given in typical values under standard conditions

* Phase to phase

Voltages and currents given in peak values

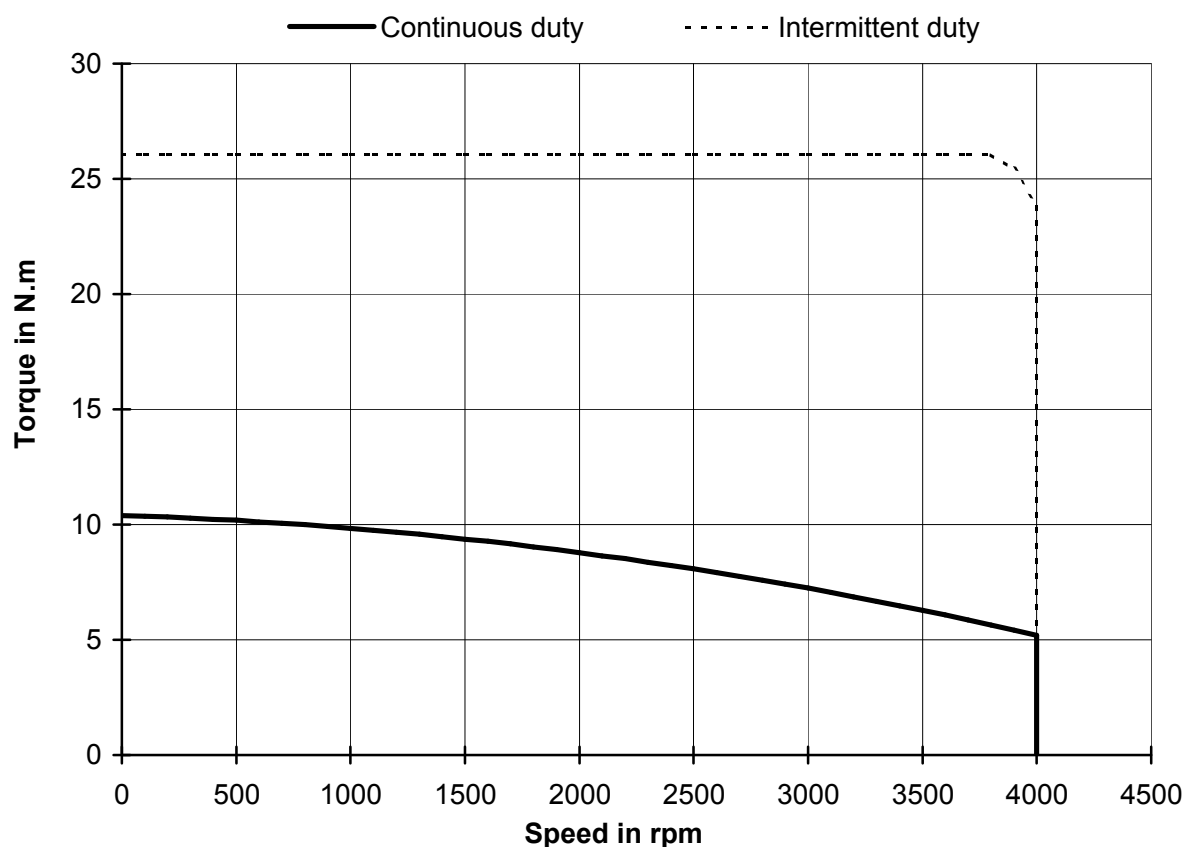

Characteristics are given for an optimal drive of the motor

FICHE-009

Création: 05 déc 2003

Edition:

25/mai/2005

EX630EAN

-