



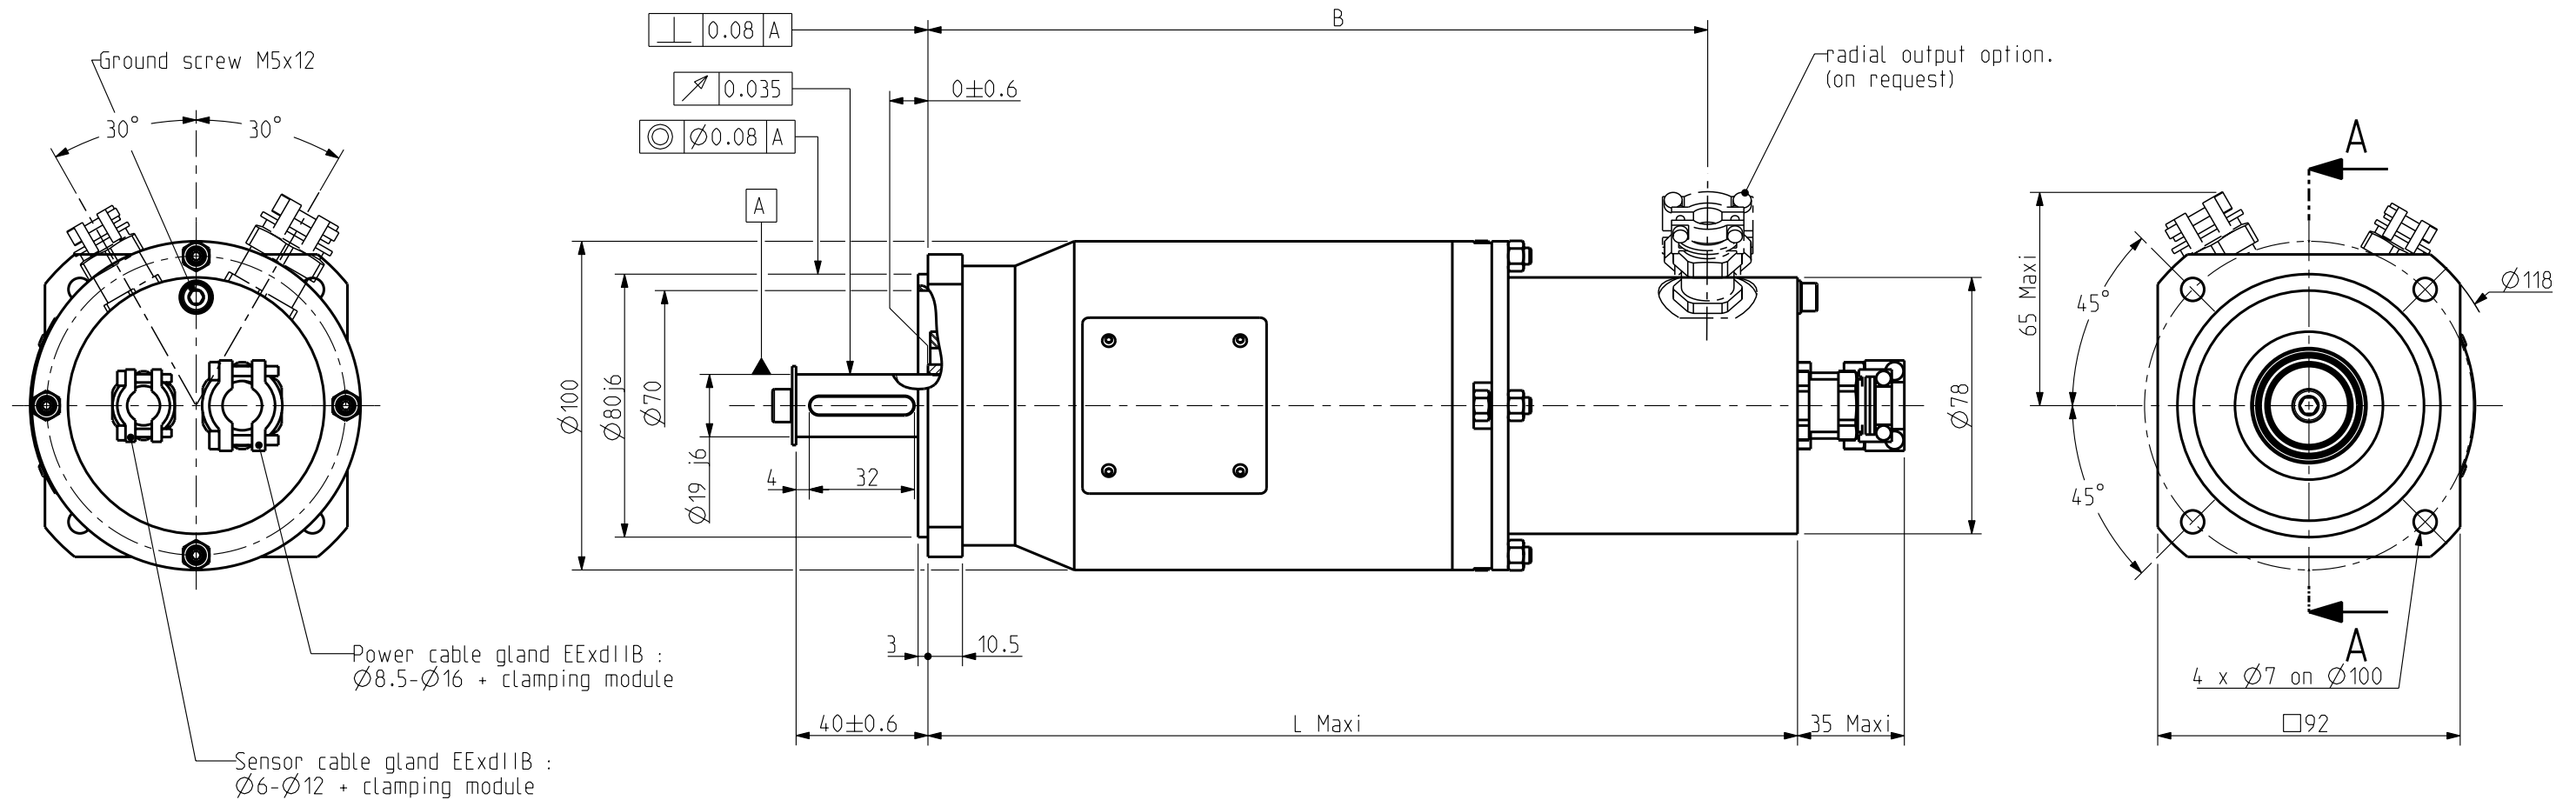

U : Phase U
 V : Phase V
 W : Phase W
 TH- : Thermic protector
 TH+ : Thermic protector
 BR- : No connection
 BR+ : No connection
 S1 : Resolver 1
 S2 : Resolver 2
 S3 : Resolver 3
 S4 : Resolver 4
 R1 : Resolver 5
 R2 : Resolver 6
 B : Shield option (screw M3)
 Ground

PRINTED CIRCUIT (under the cap)

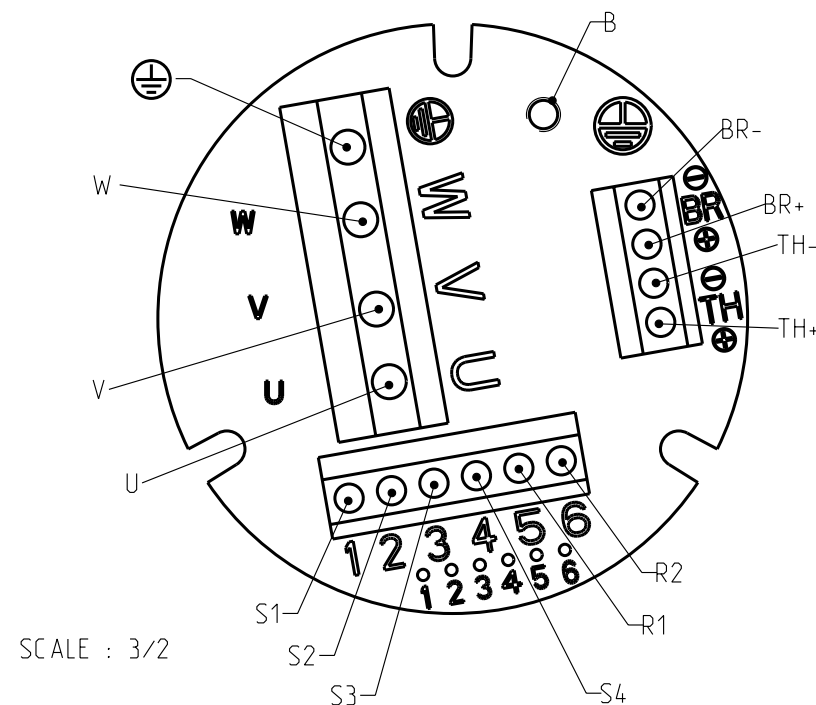


Protection II 2 G EEx d II B T4 :
 * EN 50014 : GENERAL RULES
 * EN 50018 : FLAMEPROOF "d"
 * EN 50281-1-1 : COMBUSTIBLE DUST
 Certification : INERIS 04ATEX0097X

DIMENSIONS

	EX420	EX430
L Maxi	265	290
B	240	265

SHAFT END

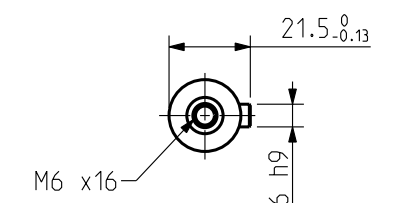

Drawing valid for : -

Weight :

This document is the property of PARVEX. Transmission as well as reproduction or copy is not permitted without written authorisation.

Drawn	19/01/05	YG	Visa						
Modifications									

Scale
1:1

SSD DRIVES
PARVEX
 8 Avenue du lac. BP249
 21007-DIJON cedex-FRANCE
 www.parvex.com

EX400
 OUTLINE DRAWING

Format	F	E	S	G	I	
A3	x	x				
344619AE1201						-