


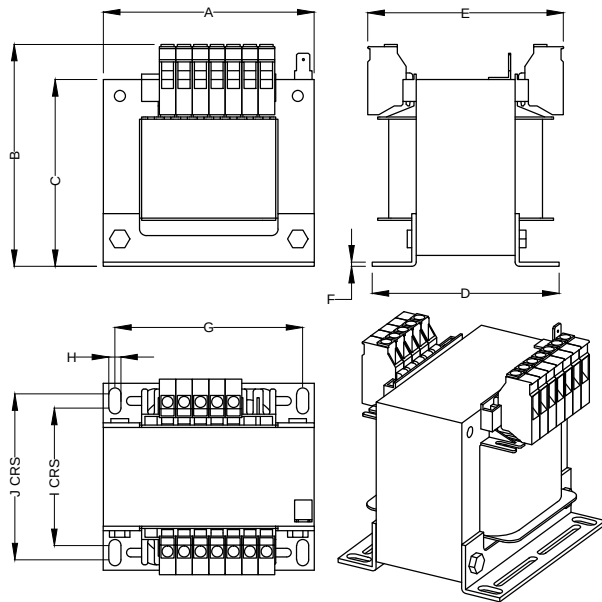

DIMENSIONS IN MM										
VA RATING	A	B	C	D	E	F	G	H	I	J
50VA	75	88	68	58	72	1.5	56	4.5	42	48
100VA	85	94	74	60	74	1.5	64	4.5	42	48
150VA	96	103	86	78	84	2	84	5.5	58	68
200VA	96	103	86	88	93	2	84	5.5	66	76
250VA	120	120	104	89	90	2	90	5.5	68	78
300VA	120	120	104	102	102	2	90	5.5	80	90
400VA	120	120	104	108	110	2	90	5.5	87	97
500VA	120	120	104	120	120	2	90	5.5	109	119
750VA	150	144	130	105	98	3	122	6.5	78	90
1KVA	150	144	130	122	116	3	122	6.5	96	108
1.5KVA	150	144	130	148	141	3	122	6.5	122	134

WV TRANSFORMER VA AND VOLTAGE TYPES

VOLTAGE TYPES:

INPUT

P7- 0/380/400/420/440/460/480V

OUTPUTS

S7- 0/24V 0/24V for series or parallel connection
or

S8- 0/110V 0/110V for series or parallel connection

VA RATINGS:

50VA all voltage types above

100VA all voltage types above

150VA all voltage types above

200VA all voltage types above

250VA all voltage types above

300VA all voltage types above

400VA all voltage types above

500VA all voltage types above

750VA all voltage types above

1kVA all voltage types above

1.5KVA all voltage types above

I

Input terminals 4mm sq

Output terminals 4mm sq

Drawing Number TX 41029003

Title WV TRANSFORMERS
7 SM & 4 SM TERMINALS

Project STOCK TRANSFORMERS

Drawn Date 01/09/2014

Sheet Number 1 Of 1

Drawn By RDT

Scale NTS Revision 1

Company Name

Eastern Transformers & Equipment Ltd

Units H1 & H2 Overland Business Park
Great Whelnetham
Bury St Edmunds, Suffolk, ENGLAND, IP30 0UL

Telephone No 0044 (0) 1284 388033

Email Address info@ete.co.uk

Web Address www.ete.co.uk