



Main

Product or component type	EMC input filter
Range compatibility	Altivar 61 Altivar 71 Altivar 212
Product compatibility	ATV61HD30M3X ATV61HD37M3X ATV61HD45M3X ATV61HD45N4 ATV61HD55N4 ATV61HD75N4 ATV71HD30M3X ATV71HD37M3X ATV71HD45M3X ATV71HD45N4 ATV71HD55N4 ATV71HD75N4 ATV212HD30M3X ATV212HD55N4 ATV212HD75N4 ATV71WD45N4 ATV71WD55N4 ATV71WD75N4
Product specific application	Radio interference input filter
[In] rated current	180 A
Thermal losses	18 W for ATV21HD55N4 34 W for ATV21HD75N4 23.1 W for ATV21HD30M3X 58 W for ATV61/ATV71 variable speed drives
Network number of phases	Three phase

Complementary

Electrical connection	Terminal 150 mm ² 300 kcmil
Tightening torque	25 N.m
Earth leakage current	140 mA at 400 V 50 Hz 193 mA at 480 V 60 Hz 80 mA at 400 V 50 Hz 86.3 mA at 480 V 60 Hz
Network rated voltage	200...240 V 380...500 V
Tolerance	10 %
Product weight	40 kg

Environment

IP degree of protection	IP20 IP41 (upper part)
Relative humidity	<= 93 % conforming to IEC 68-2-3
Ambient air temperature for operation	-10...50 °C
Ambient air temperature for storage	-40...65 °C
Operating altitude	<= 1000 m without current derating <= 1000 m without derating 1000...3000 m with current derating 1 % per 100 m
Vibration resistance	1.5 mm peak to peak (f = 3...13 Hz) conforming to IEC 60068-2-6 1 gn (f = 13...150 Hz) conforming to IEC 60068-2-6
Shock resistance	15 gn for 11 ms conforming to EN/IEC 60068-2-27
Standards	EN 133200 EN/IEC 61800-3


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0640 - Schneider Electric declaration of conformity

Mounting Recommendations

Mounting the Filter Under the Drive

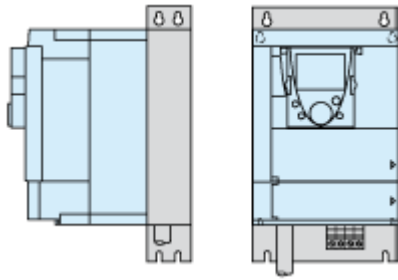

Mounting the Filter Next to the Drive

