


Drawings P132-200

IC06-86W

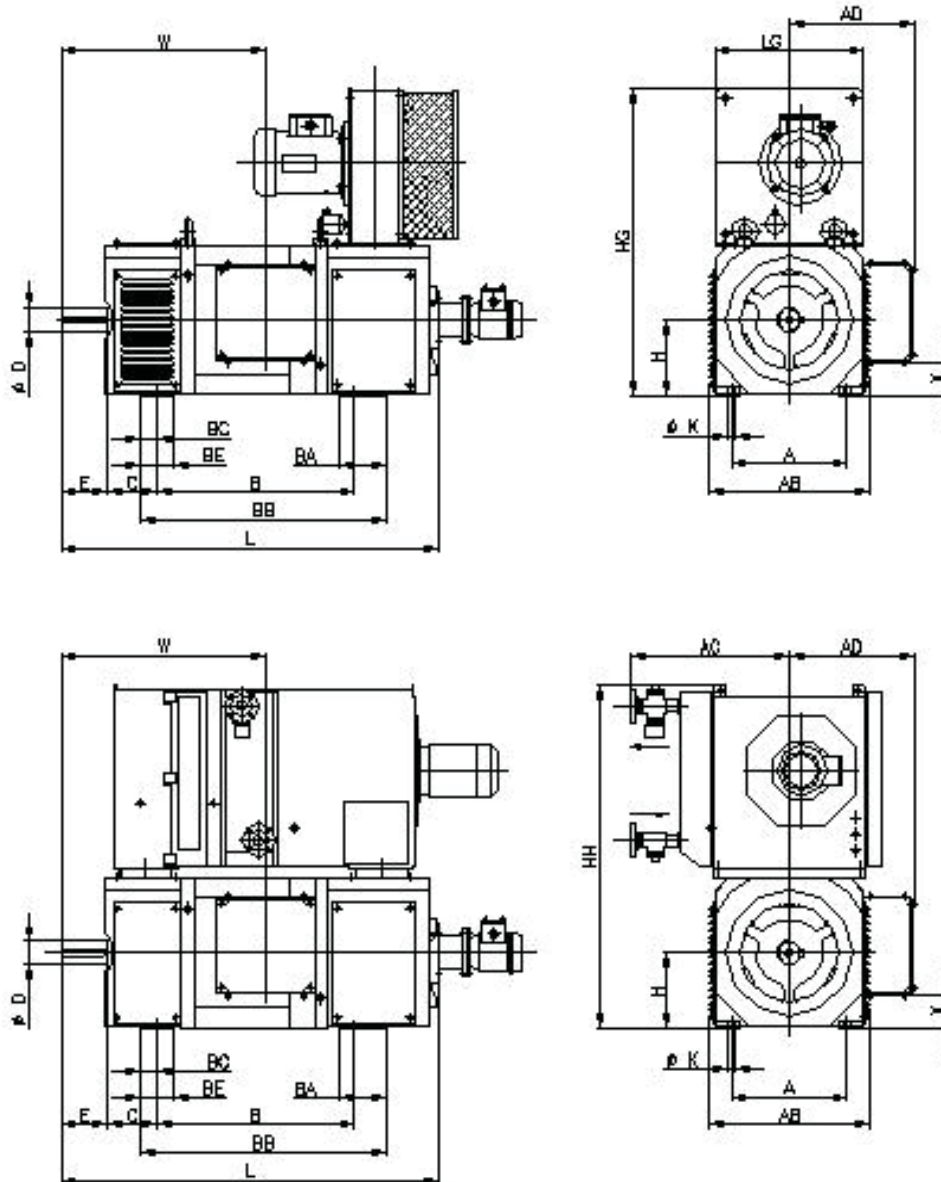

FRAME	D	E	C	B	BA	BB	BC	BE	L	W	AD	H	HG	HH	K	A	AB	X	LG	AC
P 132 K(N)S2	38 k6			325		393			625	355										
P 132 K(N)M2	with	80	89	365	60	433	35	60	665	395	235	132	525	745	12	216	287	50	258	470
P 132 K(N)L2	key			415		483			715	445		0								
P 132 K(N)X2				445		513			745	475		-0,5								
P 160 K(N)S2	48 k6			415		498			765	452										
P 160 K(N)M2	with	110	108	465	70	548	41	70	815	502	275	160	630	865	15	254	343	70	308	475
P 160 K(N)L2	key			530		613			880	567		0								
P 160 K(N)X2				570		653			920	607		-0,5								
P 180 K(N)S4	55 m6			475		595			905	492										
P 180 K(N)M4	with	110	121	530	115	650	41	80	960	547	300	180	735	930	15	279	390	80	358	525
P 180 K(N)L4	key			605		725			1035	622		0								
P 180 K(N)X4				650		770			1080	667		-0,5								
P 200 K(N)S4	65 m6			480		617			975	527										
P 200 K(N)M4	with	140	133	545	120	682	55	90	1040	592	365	200	846	1045	19	318	423	83	408	550
P200 K(N)L4	key			630		767			1125	677		0								
P 200 K(N)X4				680		817			1175	727		-0,5								

Note : detailed drawings are available on SICMEMOTORI web site www.sicmemotori.com