



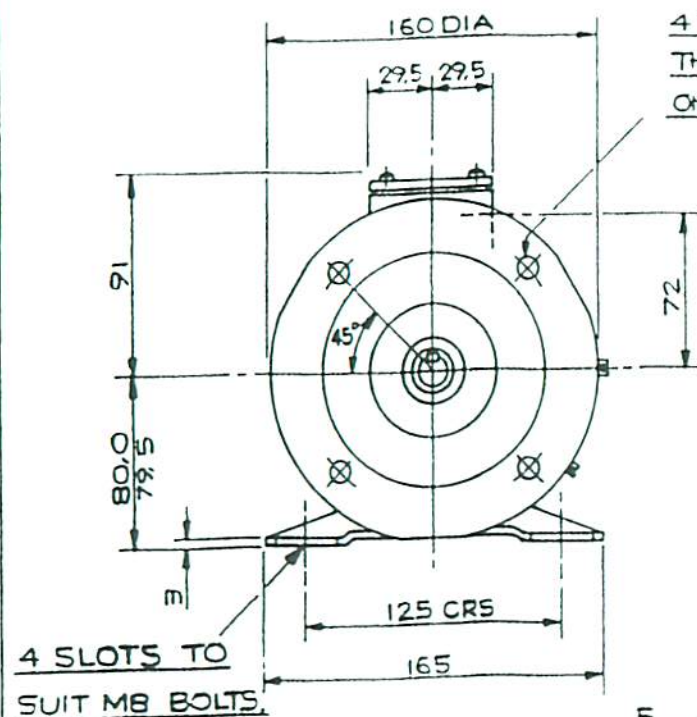

4 HOLES 10 DIA
THRO EQUI-SPACED
ON A 130.0 P.C.DIA.

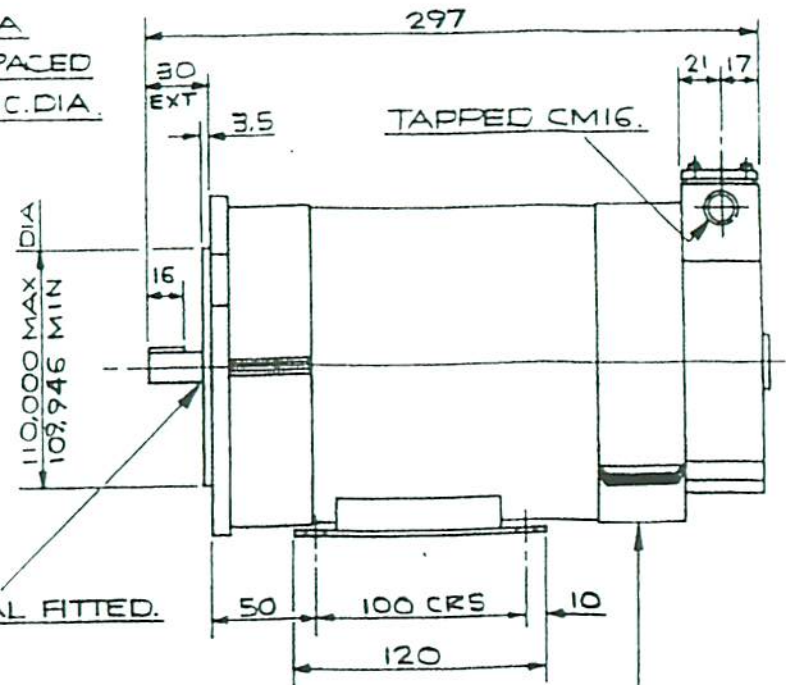


OILSEAL FITTED.

REMOVE COVER TO GAIN
ACCESS TO BRUSH/GEAR.

COVERS WILL BE FITTED TO SUIT
COOLING & ENCLOSURE ON ORDER.

Brook Crompton

Stock 99011240

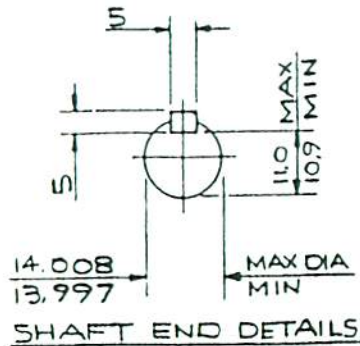

MP 80/075	0.37	2000	180	2.5	22	01	14 Kg
FRAME	K.W.	r/min	ARM V	ARMA	I.P.	I.C.	MASS

REV	DATE	REV	DATE	REV	DATE	REV	DATE
INITIALS		INITIALS		INITIALS		INITIALS	

ISSUED BY D.SPO.
AT BLACKHEATH.
DRN N TAYLOR DATE 20-4
KS DATE 3/9
SIMILAR DRAWINGS
617.5604.9351.11

BROOK CROMPTON

BLACK HEATH.

OUTLINE DIMENSIONS OF A
PERMANENT MAGNET DC MOTOR.

GENERAL TOLERANCE NOTES
UNTOLERANCED DECIMAL MACHINING DIMENSIONS ARE TO BE WITHIN THE FOLLOWING LIMITS (TOL MUST NOT BE CUMULATIVE)
BORE DIAMETERS SLOT AND RECESS DEPTHS AND WIDTHS SIZE TO $\pm 0.25\text{mm}$ (± 0.010)
SHAFT DIAMETERS AND SPIGOT HEIGHTS SIZE TO $\pm 0.25\text{mm}$ (± 0.010)
CENTRE DISTANCES AND CENTRE TO FACES SIZE TO $\pm 0.13\text{mm}$ (± 0.005)
MARKED OFF DECIMAL CENTRE DISTANCES AND CENTRES TO FACES SIZE TO $\pm 0.25\text{mm}$ (± 0.010)

MACHINING NOTES
WHERE MACHINED SURFACES ARE SPECIFIED CLA VALUES ARE GIVEN IN MICROMETRES/MICROINCHES
ISO METRIC THREADS TO BS 3643 PT 2
By 6H Fit

CONFIDENTIAL COPYRIGHT
© 1993

FIRST ORDER No 1234 1240
SCALE —
DRG No 617.5604.9551.01
SIZE A3 297 x 420
THIRD ANGLE PROJECTION